

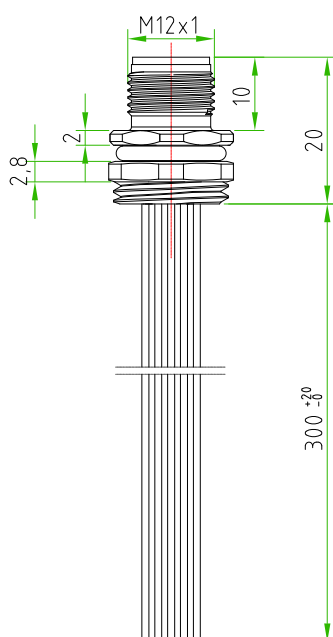



Rev.	Modify	Date	Signed	Approved


Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved

A4




PAY ATTENTION to the position of the polarization key towards the exagonal fixing nut.



- BROWN ○ ————— ■ 1
- WHITE ○ ————— ■ 2
- BLUE ○ ————— ■ 3
- BLACK ○ ————— ■ 4
- GREY ○ ————— ■ 5

CONNECTOR FEATURES	PRODUCT TYPE	M12 CIRCULAR CONNECTOR TO PANEL WITH WIRES.
	TYPE MOUNTING	FRONTAL MOUNTING
	CONTACTS TYPE	MALE 5POLES
	NUMBER OF CONTACTS CONNECTED	N°5
	HOUSING MATERIAL	BRASS+NICKEL PLATED
	O-RING MATERIAL	NBR
	FIXING THREAD	PG9
	SIZE FIXED NUT(SW)	SW17
	SIZE MOBILE NUT(SW)	SW17
	PROTECTION CLASS	IP67
	RATED VOLTAGE	60V AC/DC
	RATED CURRENT	4 A
WIRES FEATURES	CONNECTOR WITHOUT ANY LOGO	
	NUMBER OF CONDUCTORS	N°5
	CONDUCTORS SECTION	0,25mm ²
	CONDUCTORS INSULATION MATERIAL	PVC
	CONDUCTORS LENGHT	300mm

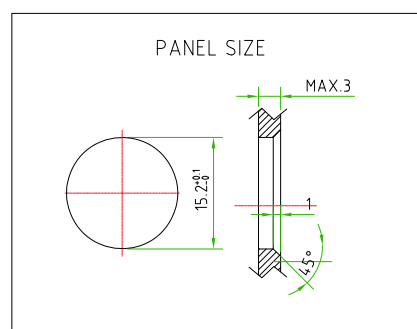

CUSTOMER APPROVAL

SIGNATURE

DATE

PLEASE SIGN
AND RETURN

Designer	SUGLIANI R.	Date	2021-02-15	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n. 1-1
Approved	CIMMINO L.	Date	2021-02-15	Scale	1:1	Size:	A4	Customer code:		



DESCRIPTION
CIRCULAR CONNECTOR M12, MALE, TO PANEL, 5POLES, FRONTAL MOUNTING, PG9 THREAD, WITH N°5 WIRES PVC 0,25mm² L=300mm
CONNECTOR WITHOUT ANY LOGO

H.T.P. PART NUMBER

12MP5A0C-PG9