


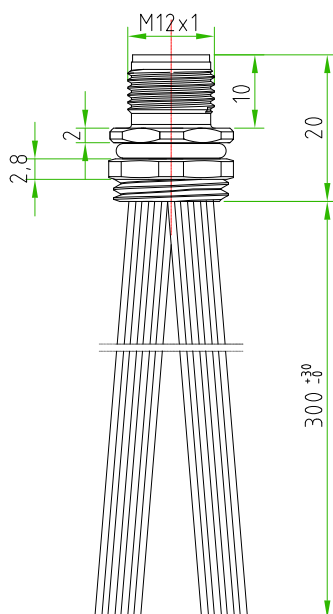


Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved


Rev.	Modify	Date	Signed	Approved



PAY ATTENTION to the position of the polarization key towards the hexagonal fixing nut.

WHITE	1
BROWN	2
GREEN	3
YELLOW	4
GREY	5
PINK	6
BLUE	7
RED	8

CONNECTOR FEATURES	PRODUCT TYPE	M12 CIRCULAR CONNECTOR TO PANEL WITH WIRES.
	TYPE MOUNTING	FRONTAL MOUNTING
	CONTACTS TYPE	MALE 8POLES
	NUMBER OF CONTACTS CONNECTED	N°8
	HOUSING MATERIAL	BRASS+NICKEL PLATED
	O-RING MATERIAL	NBR
	FIXING THREAD	PG9
	SIZE FIXED NUT(SW)	SW17
	SIZE MOBILE NUT(SW)	SW17
	PROTECTION CLASS	IP67
	RATED VOLTAGE	30V AC/DC
	RATED CURRENT	2A
WIRES FEATURES	CONNECTOR WITHOUT ANY LOGO	
	NUMBER OF CONDUCTORS	N°8
	CONDUCTORS SECTION	0,25mm ²
	CONDUCTORS LENGTH	300mm

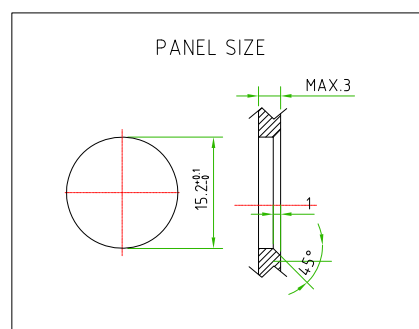


CUSTOMER APPROVAL

SIGNATURE

DATE

PLEASE SIGN AND RETURN

A4



Designer	CIMMINO L.	Date	2020-01-16	Tolerance	±0.3	Units	mm	Series	M12	Drawing n. 1-1
Approved	MAZZOLA M.	Date	2020-01-16	Scale	1:1	Size	A4	Customer code:		



DESCRIPTION

CIRCULAR CONNECTOR M12, MALE, TO PANEL, 8POLES, FRONTAL MOUNTING, PG9 THREAD, WITH N°8 WIRES PVC 0,25mm² L=0.3m
CONNECTOR WITHOUT ANY LOGO

H.T.P. PART NUMBER

12MP8A0C-PG9