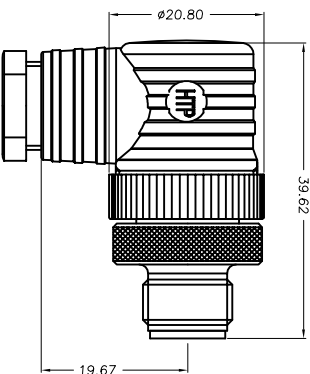
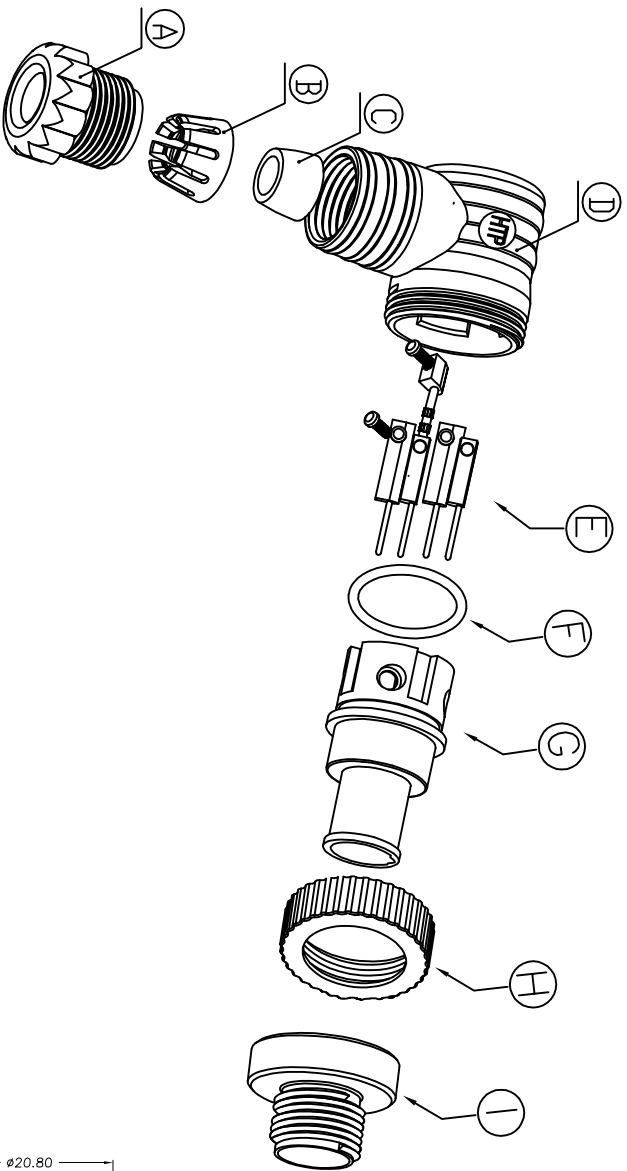


CONNECTOR FEATURES

TYPE CONTACT	MALE
NUMBER OF CONTACT	5 POLES
HOUSING	NYLON6 + 30%GLASS FIBRE
TYPE HOUSING	90°
COLOUR HOUSING	BLACK
PRESS CABLE SCREW	PG7
RATED VOLTAGE:	125V AC/DC
RATED CURRENT:	2A
CONTACT MATERIAL	PHOSPHOROUS BRONZE
CONTACT SURFACE MATERIAL:	NICKEL +0.45µm
COUPLING NUT MATERIAL:	Zn Al/Ni
O-RING:	NBR
PROTECTION CLASS:	IP67
TEMPERATURE RANGE:	-25°C TO +90°C

A	PRESS CABLE SREW
B	LAMELLAE PRESS-CABLE SEAL
C	GASKET PRESS-CABLE SEAL
D	HOUSING BLACK
E	SCREW CONTACT GOLD PLATED
F	O-RING
G	INTERNAL CORE M12 B-CODED
H	PLASTIC NUT FOR HOUSING
I	M12 NUT Zn Al/Ni

TOLLERANCE		DISIGNATURE MARCO MAZZOLINI		DATA	SCALE	PESD	
U4M	ANGOLD	CONTROLLATO		14.01.09	1:1		
DESCRIZIONE				TIPO	MATERIALE		
M12 MALE TO CABLE SPOLES 90° BLACK PG7 B-CODED WITH LOGO HTP				M12			
High Tech Products  HTP				CODICE	B-12MB5000		
HIGH TECH PRODUCTS							