



Rev.	Modify	Date	Signed	Approved



Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved

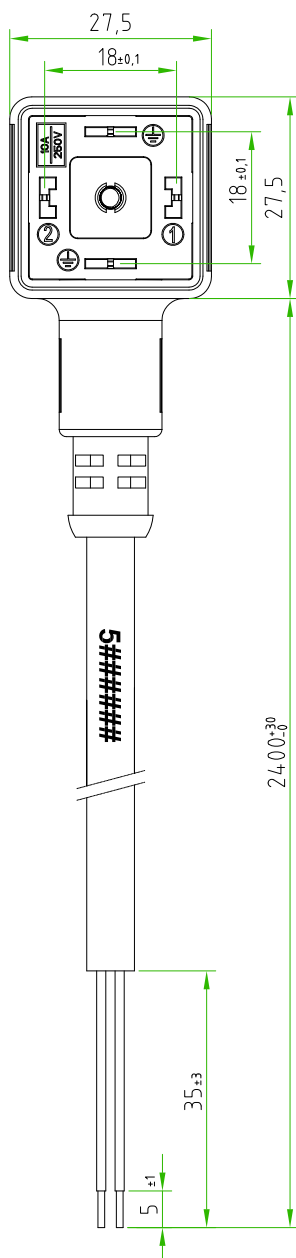

BROWN ○ ————— C 1
 BLUE ○ ————— C 2
 N.C. C ⊕
 N.C. C ⊖

CONNECTOR FEATURES	PRODUCT TYPE	SQUARE CONNECTOR EN175301-803(type-A)
	CONNECTOR COLOUR	BLACK
	CONTACTS SPACING	18mm
	NUMBER OF CONTACTS	2POLES+2EARTHS
	EARTH POSITIONING	H.6-12 NOT CONNECTED
	CENTRAL FIXING SCREW	M3X0,5 L=25mm
	GASKET TYPE	INTEGRATED (NBR)
	PROTECTION CLASS	IP67
	CIRCUIT TYPE	WITHOUT ELECTRONIC
	RATED VOLTAGE	250V AC / 300V DC
CABLE FEATURES	CONNECTOR WITH H.T.P. LOGO	
	H.T.P. CABLE CODE	CAVO A2
	NUMBER OF CONDUCTORS	N°2
	CONDUCTORS SECTION	0,75mm ²
	CABLE MATERIAL	PVC IEC332-1 H05VVF
	COATING COLOUR	BLACK
	CONDUCTORS INSULATION MATERIAL	PVC
	CABLE LENGHT	2400mm
	STRIPPING	35mm STANDARD
	PEELING AND TINNING	5mm STANDARD
ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####		

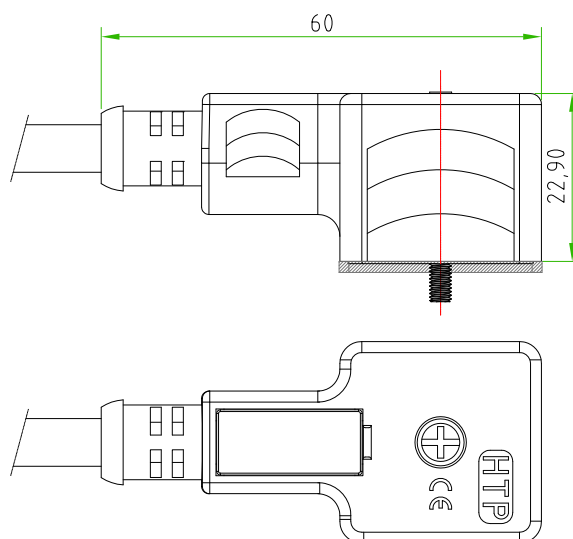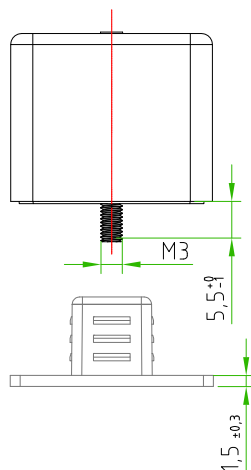

CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

Designer	SUGLIANI R.	Date	2021-06-18	Tolerance	±0.3	Units:	mm	Series	EN175301-803	Drawing n. 1-1
Approved	CIMMINO L.	Date	2021-06-18	Scale	1:1	Size:	A4	Customer code:		

 	DESCRIPTION	H.T.P. PART NUMBER
	SQUARE CONNECTOR EN175301-803(type-A), 2P.+P.E., BLACK, WITHOUT ELECTRONIC, 250V AC / 300V DC, WITH CABLE PVC/PVC, IEC332-1 H05VVF, 2X0.75mm ² , BLACK COLOUR, L=2,4m CONNECTOR WITH H.T.P. LOGO	CG1N02000CA22D

