



Rev.	Modify	Date	Signed	Approved



Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved

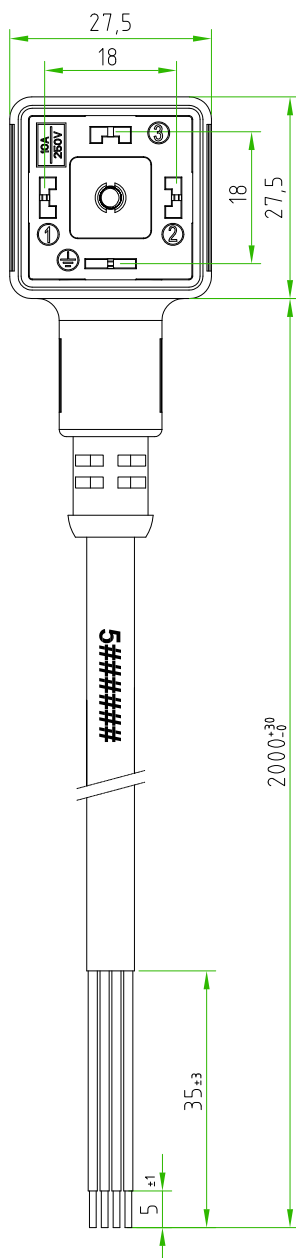

BROWN ○ ———— C 1
 BLUE ○ ———— C 2
 BLACK ○ ———— C 3
 YELLOW/GREEN ○ ———— C ⚡

CONNECTOR FEATURES	
PRODUCT TYPE	SQUARE CONNECTOR EN175301-803(type-A)
CONNECTOR COLOUR	BLACK
CONTACTS SPACING	18mm
NUMBER OF CONTACTS	3POLES+EARTH
EARTH POSITIONING	H.6
CENTRAL FIXING SCREW	M3X0,5 L=25mm
GASKET TYPE	INTEGRATED (NBR)
PROTECTION CLASS	IP67
CIRCUIT TYPE	WITHOUT ELECTRONIC
RATED VOLTAGE	250V AC/ 300V DC
CONNECTOR WITH H.T.P.LOGO	
CABLE FEATURES	
H.T.P.CABLE CODE	CAVO B2
NUMBER OF CONDUCTORS	N°4
CONDUCTORS SECTION	0,75mm ²
CABLE MATERIAL	PVC IEC332-1 H05VVF
COATING COLOUR	BLACK
CONDUCTORS INSULATION MATERIAL	PVC
CABLE LENGHT	2000mm
STRIPPING	35mm STANDARD
PEELING AND TINNING	5mm STANDARD
ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####	

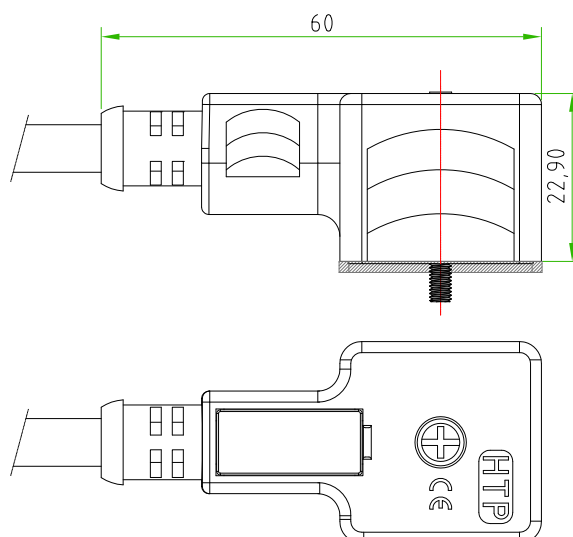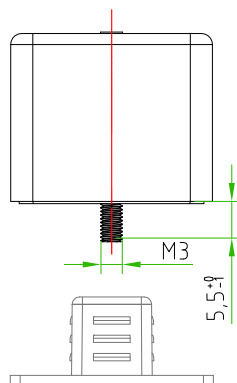

CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

Designer	CIMMINO L.	Date	2018-09-06	Tolerance	±0.1	Units:	mm	Series	EN175301-803	Drawing n. 1-1
Approved	MAZZOLA M.	Date	2018-09-06	Scale	1:1	Size:	A4	Customer code:		

	DESCRIPTION SQUARE CONNECTOR EN175301-803(type-A), 3P.+P.E., BLACK, WITHOUT ELECTRONIC, 250V AC/300V DC, WITH CABLE PVC/PVC, IEC332-1 H05VVF, 4G0.5mm ² , BLACK, L=2m. CONNECTOR WITH H.T.P.LOGO	H.T.P.PART NUMBER CG1N03000AB22