

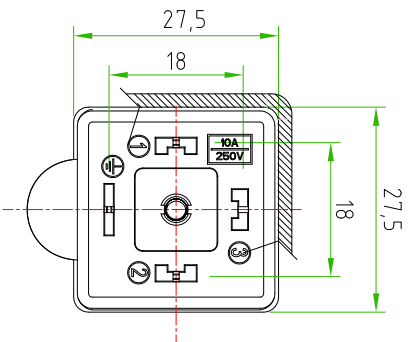


- BROWN ○ ——— (1
- BLUE ○ ——— (2
- BLACK ○ ——— (3
- YELLOW-GREEN ○ ——— ($\frac{1}{2}$ (H.6)

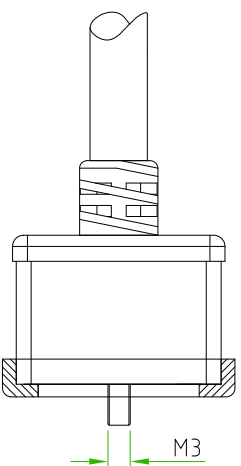

CONNECTOR FEATURES		CABLE FEATURES	
PRODUCT TYPE	SQUARE CONNECTOR EN175301-8031Type-A), TOP EXIT	H.T.P CABLE CODE	CAVO B2
CONNECTOR COLOUR	BLACK	NUMBER OF CONDUCTORS	N°4
CONTACTS SPACING	18mm	CONDUCTORS SECTION	0,75mm²
NUMBER OF CONTACTS	3POLES+EARTH	CABLE MATERIAL	PVC IEC332-1 H05VVF
EARTH POSITIONING	H 6	COATING COLOUR	BLACK
CENTRAL FIXING SCREW	M3X0,5 L=21,5mm	CONDUCTORS INSULATION MATERIAL	PVC
GASKET TYPE	PROFILED (NBR)	CABLE LENGTH	3000mm
PROTECTION CLASS	IP 67	STRIPPING	35mm STANDARD
CIRCUIT TYPE	WITHOUT ELECTRONIC	PEELING AND TINNING	5mm STANDARD
RATED VOLTAGE	250V AC/300V DC	ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P., PRODUCTION DATE CODE 5####	
CONNECTOR WITH H.T.P. LOGO			

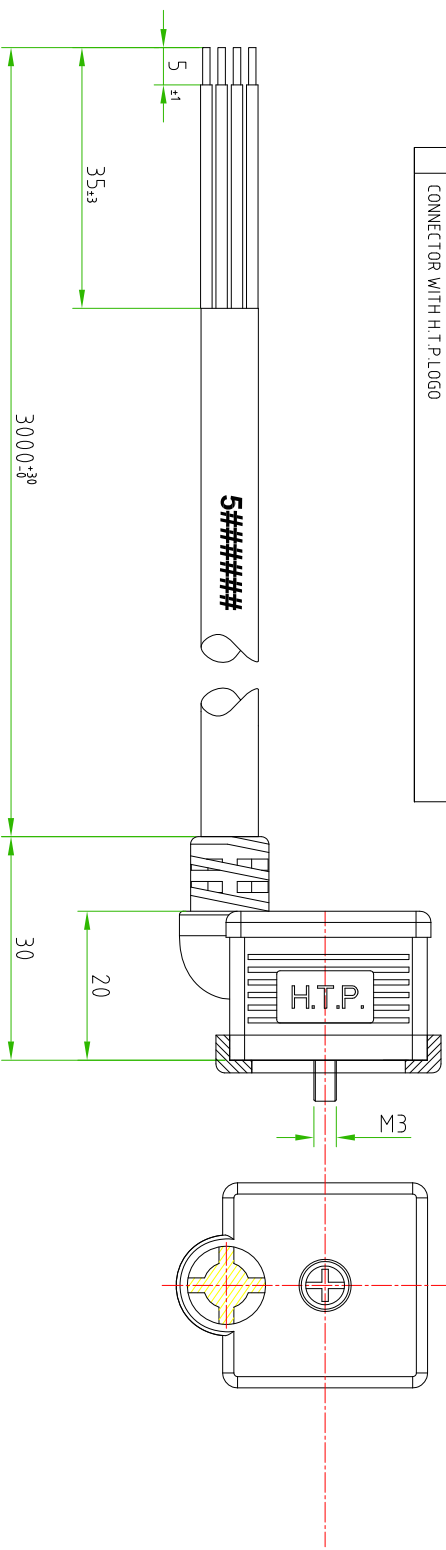

TOLLERANZE		DATA	SCALA	DESIGN N.	
±0,3	DESIGNATORE	24-09-2021	1 : 1		
UMH	LORENZO CHINNO				
ANGOLO	CONTROLLATO				
DESCRIZIONE DMA3650/A 3POLES-EARTH-TOP EXIT 180° WITHOUT ELECTRONIC WITH PVC/PVC CABLE .IEC332-1 H05VVF. BLACK 4G0.75mm² L=3m CONNECTOR WITH H.T.P10G50				MATERIALE	
CGB					